


### Key features

- Third-party network cameras supported
- Up to 2 Megapixels resolution recording
- HDMI and VGA output at up to 1920×1080P resolution
- HDD quota and group management
- Independent network interfaces for built-in switch

### Rear Panel of BAN-GI-NVR

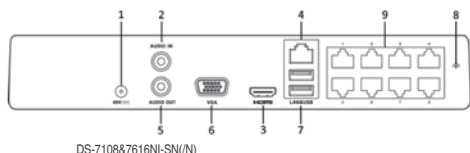

DS-7108&7616NI-SN/(N)

1. Power Supply
2. Audio In
3. HDMI Interface
4. LAN Network Interface
5. Audio Out
6. VGA Interface
7. USB Interface
8. Ground
9. Built-in Switch Ethernet Interface

BAN-GI-NVR	
<b>Video/Audio input</b>	
Video input	8-ch
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1kΩ)
<b>Network</b>	
Incoming bandwidth	50Mbps
Outgoing bandwidth	40Mbps
Remote connection	128
<b>Video/Audio output</b>	
HDMI/VGA output	1-ch, resolution: 1920 × 1080P /60Hz, 1280 × 1024 /60Hz, 1280 × 720 /60Hz, 1024 × 768 /60Hz
Audio output	1-ch, RCA (Linear, 1kΩ)
<b>Decoding</b>	
Live view / Playback resolution	1080P /UXGA /720P /VGA /4CIF /DCIF /2CIF /CIF /QCIF
Capability	8-ch@4CIF, 4-ch@720P, 2-ch@1080P
<b>Hard disk</b>	
SATA	1 SATA interface for 1 HDD
Capacity	Up to 4TB for each disk
<b>External interface</b>	
Network interface	1 RJ-45 10 / 100 / 1000 Mbps self-adaptive Ethernet interface
Built-in switch network interface(DS-7104/08/16NI-SN/N supported)	8 independent 10 /100 Mbps Ethernet interfaces
USB interface	2 × USB 2.0
<b>Others</b>	
Power supply	12V DC
Consumption (without hard disk and PoE)	≤ 10 W
Working temperature	-10 °C ~ +55 °C (+14 °F~ + 131 °F)
Working humidity	10 % ~ 90 %
Chassis	1U chassis
Dimensions(W × D × H)	285 × 210 × 45 mm
Weight	≤ 1 Kg ( without hard disk)